




# JOLI <sup>NEW</sup>

## SPECIFICATIONS

base code	67735 JOLI 1 (pole with round module), 67741 JOLI 1 (round module only) 67738 JOLI 2 (pole with three projectors), 67744 JOLI 2 (one projector only) 67740 JOLI 3 (pole with one round module and two projectors)
typology	Pole-top luminaire with round module and/or projectors
mounting	In the ground
diameter	Pole: 60 mm / 2.36" Round module: 400 mm / 15.75" Projector: 55 mm / 2.17"
height	Pole: 4500 mm / 177.17" Round module: 80 mm / 3.15" Projector: 150 mm / 5.91"
construction	Pole: galvanized iron. Round module: iron Projector: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	JOLI 1, JOLI 3: IP65. JOLI 2: IP67. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	JOLI 1: 40W at 48V DC - JOLI 2: 30W at 48V DC (10W per head) - JOLI 3: 60W at 48V DC (10W per head + 40W round module). North America JOLI 1: 40W at 24V DC - JOLI 2: 15W at 24V DC (5W per head) - JOLI 3: 50W at 24V DC (5W per head + 40W round module)
lamp lumens	Round module 4120lm. Projector: 10W 1100lm, 5W 550lm
delivered lumens	Round module 2415lm. Projector 10W 870lm, 5W 390lm
lumen maintenance	50.000h L90
beam	Round module: diffused. Projector 20°, 30°. Adjustable 355° on the horizontal plane and 360° on the vertical plane
kelvin	2700K CRI93 or 3000K CRI93 / 3 step MacAdam
special features	48V DC: built-in unpolarized electronic system. 24V DC: built-in reverse polarity protection. Hot plug and electronic control of the operating temperature that guarantees that the fixture will last with ambient temperature up to 60° C / 140° F. Round module: Diffuse and completely homogenous light distribution across the entire surface.
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply
certifications	CE, UL 2108, CSA C22.2

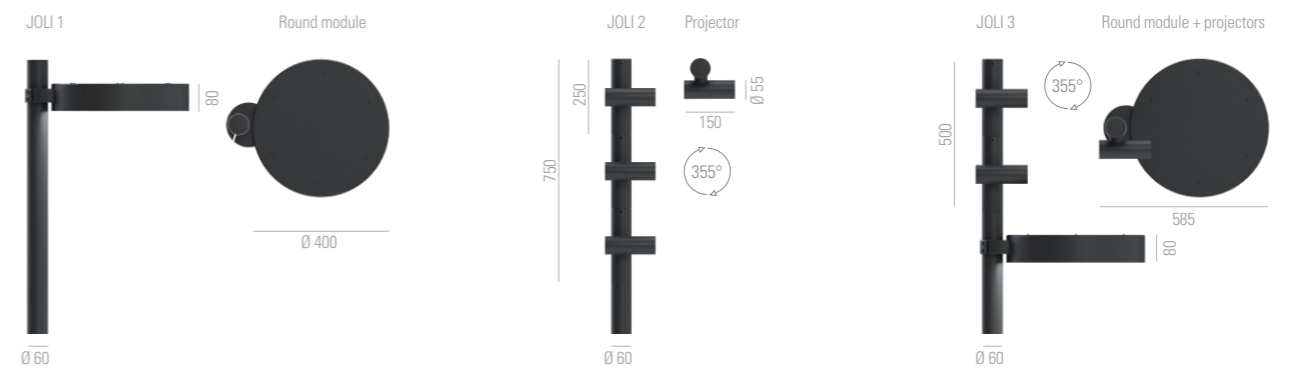


# JOLI


## ORDER CODE

**BASE CODE**

**67735** JOLI 1 (pole with round module)




**67741** JOLI 1 (round module only)



**A . POWER SUPPLY**

**8** 48V DC EXCL. power supply

**R**  listed 24V DC EXCL. power supply

**B . KELVIN**

**5** 3000K CRI93

**8** 2700K CRI93


**C . BEAM**

**A** satin diffuser

Example: BASE CODE **67735** A B C D E **8 8 A Q** = **67735 88AQ**

**D . FINISHES**

**Q** anthracite RAL 7024




**E . OTHER**


## JOLI 2

**BASE CODE**

**67738** JOLI 2 (pole with three projectors)




**67744** JOLI 2 (one projector only)



**A . POWER SUPPLY**

**8** 48V DC EXCL. power supply

**R**  listed 24V DC EXCL. power supply

**B . KELVIN**

**5** 3000K CRI93

**8** 2700K CRI93

**C . BEAM**


**2** spot 20°

**4** flood 30°


Example: BASE CODE **67738** A B C D E **8 8 2 Q B** = **67738 882QB**


**D . FINISHES**

**Q** anthracite RAL 7024



**E . LENS**

**A** honeycomb 


**B** clear 

# JOLI

## ORDER CODE


**BASE CODE**

**67740** JOLI 3



**A . POWER SUPPLY**

**8** 48V DC EXCL. power supply

**R**  listed 24V DC EXCL. power supply

**B . KELVIN**

**4** 4000K CRI93

**5** 3000K CRI93

**8** 2700K CRI93

**C . BEAM**

*Projector*


**2** spot 20°

**4** flood 30°


Example: BASE CODE **67740** A B C D E **8 8 1 1 A** = **67740 881QA**


**D . FINISHES**

**Q** anthracite RAL 7024



**E . LENS**

**A** honeycomb 

**B** clear 

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

Power supply	code	output power	input voltage / frequency	IP	dimensions mm
48V DC* ON/OFF	69182	60W	90-305V	47-63Hz	IP67 L163xW43xH32
	69187	100W	90-305V	47-63Hz	IP67 L220xW68xH39
48V DC 1-10V <sup>†</sup> or ON/OFF* for ambient temperature up to 60° C	69186	60W	90-305V	47-63Hz	IP67 L171xW62xH37
	69187	100W	90-305V	47-63Hz	IP67 L220xW68xH39
48V DC* DALI <sup>†</sup> for ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
	69196	100W	100-305V	47-63Hz	IP67 L199xW63xH36
†for a perfect dimming, it is necessary that the power supply is saturated to 100%					
48V DC 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30
48V DC 0-10V	69097	120W	90-305V	47-63Hz	IP67 L191xW63xH38
Class 2 power supply 24V DC	Consult <b>US distributor</b> Lites on West T: 212.775.6363 E: info@litesonwest.com				

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17
69848	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W78xD30xH20

\*To choose the power supply, always add a spare 20% as safety margin.  
See pag 619 for cable size and max wiring distance from power supply to last connected luminaire