


MILO X120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2 x 18V)

Power
Puissance
Potencia
2 x 10W

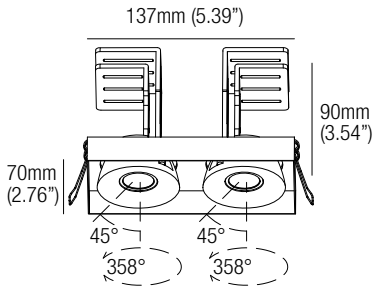

Photometric diagrams

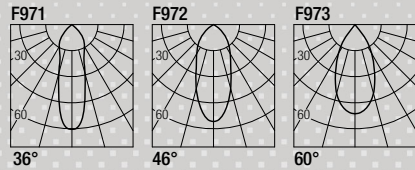

CCT	Flux _(x2)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

MLX12 | X | XX | 9 | X


MLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
				35 3500K			W 60°
				40 4000K			
				DW Dim Warm † @ 420mA			

Drivers

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
Dimming Range: 0.1%
Min. 1/Max. 1 Fixtures per Driver

Phase

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
Dimming Range: 10%
Min. 1/Max. 1 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.3

Hi-Lume 2-Wire Phase
500mA Constant Current
Dimming Range: 1%
Min. 1/Max. 1 Fixtures per Driver

Lutron Ecosystem


LDE.2

Hi-Lume Ecosystem Premier
500mA Constant Current
Dimming Range: 1%
Min. 1/Max. 1 Fixtures per Driver

Accessories - Accessoires - Accesorios

MLX12Q


Plasterboard
recessing frame
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas
de yeso



77mm x 144mm
(3.03" x 5.67")

MP-X144


Mounting Plate
with 144x77mm Hole

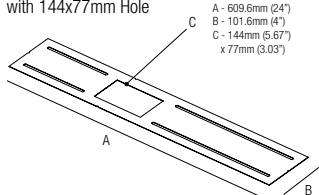

T-BAR Installation

X02144

Mounting Plate
with 144x77mm Hole

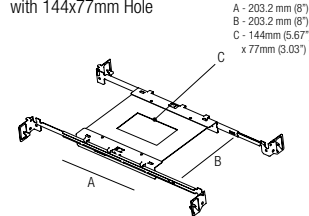


IC Housings

IC086X02144

Recessed Box for
Insulated Ceiling with
144x77mm Hole

AT086X02144

Air Tight Recessed Box
for Insulated Ceiling with
144x77mm Hole

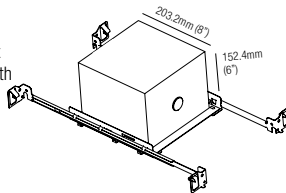

Optionals - Accessoires - Accesorios

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria