


TERA 2


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W

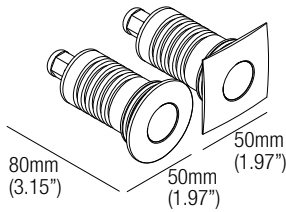

Photometric diagrams

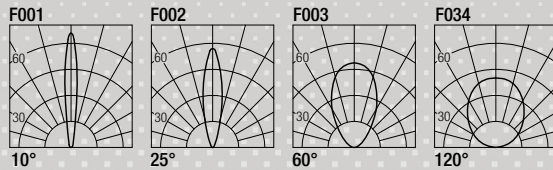

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4200K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

XT1 | X | X | XX | X |

XT1	X	Shape	X	Beam angle	XX	Color Temp.	X	Finishing
		Forma Forme		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color		Finitions Acabados
	1	Round Rond Redondo		0 10°		27 2700K		G Grey Gris
	2	Square Carré Cuadrado		1 25°		30 3000K		N Black Noir Negro
				2 60°		35 3500K		K COR-TEN
				9 120°		42 4200K		Z INOX AISI 316L Steel Acier Acero
						CU Custom		


Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V
 Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV
 12W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV
 23W 500mA Constant Current
 Dimming Range: 10%
Min. 7/Max. 14 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.1
 Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 6 Fixtures per Driver

LTEA.2
 Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 6/Max. 13 Fixtures per Driver

Lutron Ecosystem


LDE.1
 Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 10 Fixtures per Driver

LDE.2
 Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 11/Max. 16 Fixtures per Driver

Optionals - Accessoires - Accesorios


CSXT01

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CSXT01-RAB

Recessing box + RAB Housing



L001

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria