


2000 PROFILE

2000 Series



Cross-section dimensions:



WELL FOCUSED ON THE TASK!

Offering lighting without hot spots at a **45-degree** angle from a corner, the 2000 Series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style.

FEATURES

- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.












IP68: Compatible with LED engines up to **10mm** wide.
















LINEAR WEIGHT

0.117 lbs/ft, 0.175 kg/m (without lens)




Boutique Exclucity - Project Manager: J. W. Design

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>2000 - 2000 Profile, alu</p>	 <p>CLR - Clear lens, round</p>	 <p>45 - 45° corner bracket</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
	 <p>OXR - Optiflex lens, round</p>	 <p>3M - Mounting tape, double face</p>	
	 <p>OPR - Opal lens, round</p>	 <p>NO - No mounting hardware</p>	
	 <p>PRR - Prime lens, round</p>		
	 <p>OXs - Optiflex lens, square</p>		
	 <p>OPS - Opal lens, square</p>		
	 <p>NO - No lens</p>		
2000			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD1 - WarmDim 14W  WD2 - WarmDim 17W  TW1 - Tunable White 11W  TW2 - Tunable White 19W  RGB1 - RGB 14W  RGB2 - RGB 19W  RGBW1 - 3000K  RGBW2 - 3000K 4in1 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LP4 - 400 LM / 5.8W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for Warmdim Tunable White & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location O - IP68 wet/damp location. 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 5px; width: fit-content;"> <p>TITLE 24 COMPONENTS</p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

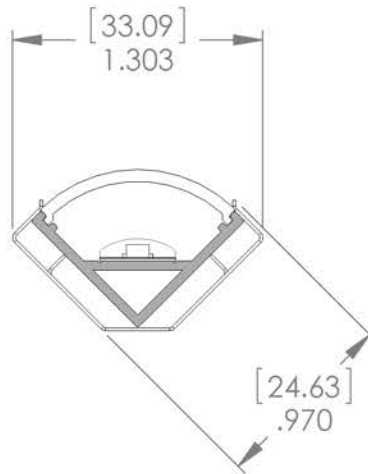

NOTES

