

3150  
3000 SERIES

LUMEN™  
Truss




# 3150 PROFILE

3000 Series

60%  
Longer  
reveal



## Cross-section dimensions:



## NEW! CONTOUR LIGHTING AT ITS BEST!

The ultimate in profiles that disappear completely into the wall surface, the 3150 is designed to provide downward lighting, 90° angle lighting. With a longer inner section than the 3100, this profile provides a greater surface area for light reflection, which optimizes safety applications in areas with poor or deficient lighting. Choice of two high-end lenses to ensure optimal light diffusion: the PRIME, which is rigid, or the new SiLens in flexible silicone, which can be installed with the touch of a finger. A new feature: it can be used with all type A joiners to build a solid structure. This profile fits 1/2" and 5/8" gypsum panels for a seamless finish. Ideal for residential or commercial applications.

### FEATURES

- Available in 96 in (2.43 m) lengths for easy and accurate on-site installation
- Direct fit with standard 1/2" and 5/8" gypsum panels
- 60% longer reveal than the 3100 profile
- Impeccable finish thanks to the grooves that allow the profile to be levelled with joint compound
- Choice of high-end optics: PRIME lens or SiLens, made of flexible silicone, which can be installed with the touch of a finger
- LED light sources in 8 mm (1.5 W/ft, 2.93 W/ft, and 4.5 W/ft) with 7 colour temperatures (2400 K to 6200 K) and in 10 mm (4.4 W/ft & 5.9 W/ft RGB and 7.0 W/ft HOS)
- Application guide for light sources 10 mm (0.394") or less in IP22
- Indoor use

### OPTIONS




### LED ENGINE COMPATIBILITY

Compatible with LED engines up to **10mm** wide.

### LINEAR WEIGHT

0.3923lbs/ft, 583.81g/m (without lens)

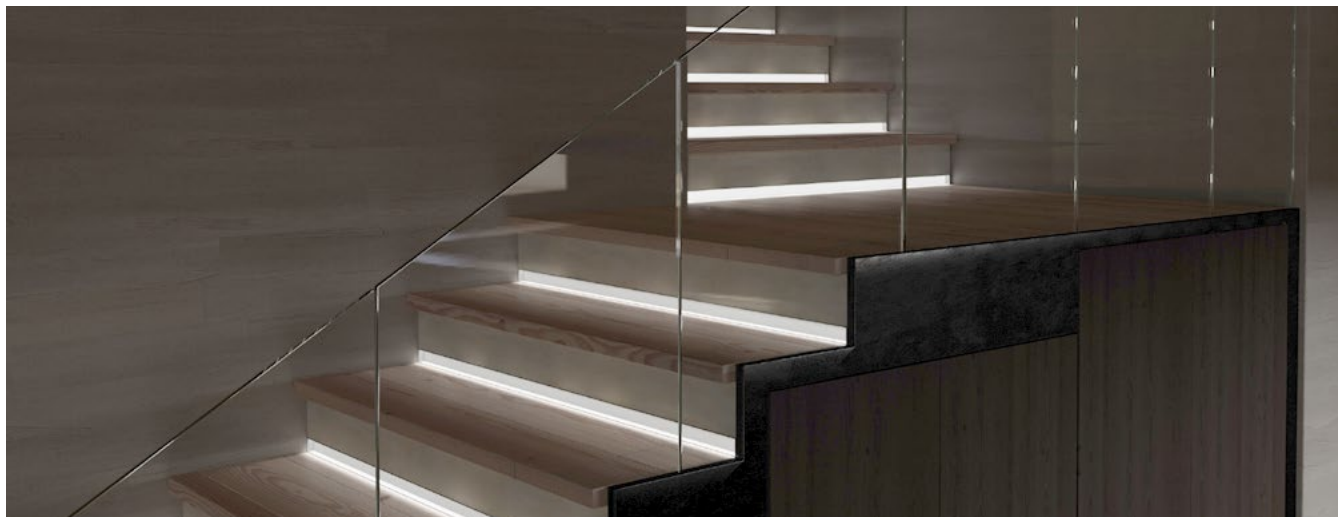





## NEW SMALL FLAT HEAD SCREW!




Our new small flat head screw fits perfectly into the V-groove of profile 3150 and other adapted profiles. This gypsum screw does not require the use of a milling cutter. Installation is faster and requires less drywall to finish, saving time and material.







### FEATURES

- Compatible with 3000 Series profiles and 8870 extrusion
- Head 35% smaller than standard gypsum screws
- Use with Robertson-tip screwdriver #2 (red)
- 100 units per pack













An ingenious tools to enhance your creative ideas and be more efficient!



PROFILE	LENGTH	LENSES
 <p>3150 QTY - Profile</p>	<p>Available in straight section of 8 feet (96 inches/2.4 m). *Cut on site</p>	 <p>PR - Prime lens</p>  <p>SIL - SiLens</p>
QUANTITY	X <b>96 INCHES</b> LENGTH	LENS


ENDCAPS		JOINERS			ACCESSORIES
 <p>3150 left endcap</p>	 <p>3150 right endcap</p>	 <p>Type A straight joiner</p>	 <p>Type A horz. 45°/135° joiner</p>	 <p>Type A horz. 90° joiner</p>	 <p>Drywall small head screw (x100)</p>
QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY

**LED engine will be assembled on site. See Appendix 3 on page 159 to see how to calculate total ordering length.**

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	LENGTH
<ul style="list-style-type: none"> <li> 24 - 2400K</li> <li> 27 - 2700K</li> <li> 30 - 3000K</li> <li> 35 - 3500K</li> <li> 42 - 4200K</li> <li> 53 - 5300K (LHP only)</li> <li> 62 - 6200K (LP only)</li> <li> WD1 - WarmDim 14W</li> <li> TW1 - Tunable White 11W</li> <li> TW2 - Tunable White 19W</li> <li> RGB1 - RGB 14W</li> <li> RGB2 - RGB 19W</li> </ul>	<ul style="list-style-type: none"> <li>LP0 - 128 LM / 1.5W FT / 90+CRI</li> <li>LP1 - 160 LM / 1.5W FT / 90+CRI</li> <li>LP2 - 255 LM / 3.0W FT / 90+CRI</li> <li>LP3 - 308 LM / 4.5W FT / 90+CRI</li> <li>LP4 - 400 LM / 5.8W FT / 90+CRI</li> <li>LHP - 700 LM / 7.0W FT / 95+CRI</li> </ul> <p><b>Note:</b> Not applicable for Warmdim, Tunable White and RGB color temperatures</p>	<ul style="list-style-type: none"> <li>HW3 - Hardwire 3 FT</li> <li>HW6 - Hardwire 6 FT</li> <li>HW9 - Hardwire 9 FT</li> <li>HWX - Hardwire custom FT</li> <li>NO - No lead</li> </ul>	<ul style="list-style-type: none"> <li>I - IP22 indoor dry location</li> </ul>	<ul style="list-style-type: none"> <li>A - Non-dimming</li> <li>B - ELV dimming 120V AC</li> <li>C - ELV dimming 120/277 VAC**</li> <li>D - 0/10V dimming 120/277 VAC</li> <li>E - Non-dimming DC plug in</li> <li>F - DMX</li> <li>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</li> <li>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</li> <li>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</li> <li>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</li> <li>NO - No driver</li> </ul>	<p><b>Total length of LED engine in inches</b> - See Appendix 3 on how to calculate length.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN    LEAD OUT	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH

\*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors. \*\* Only available in 96W - 24V Driver

# NOTES

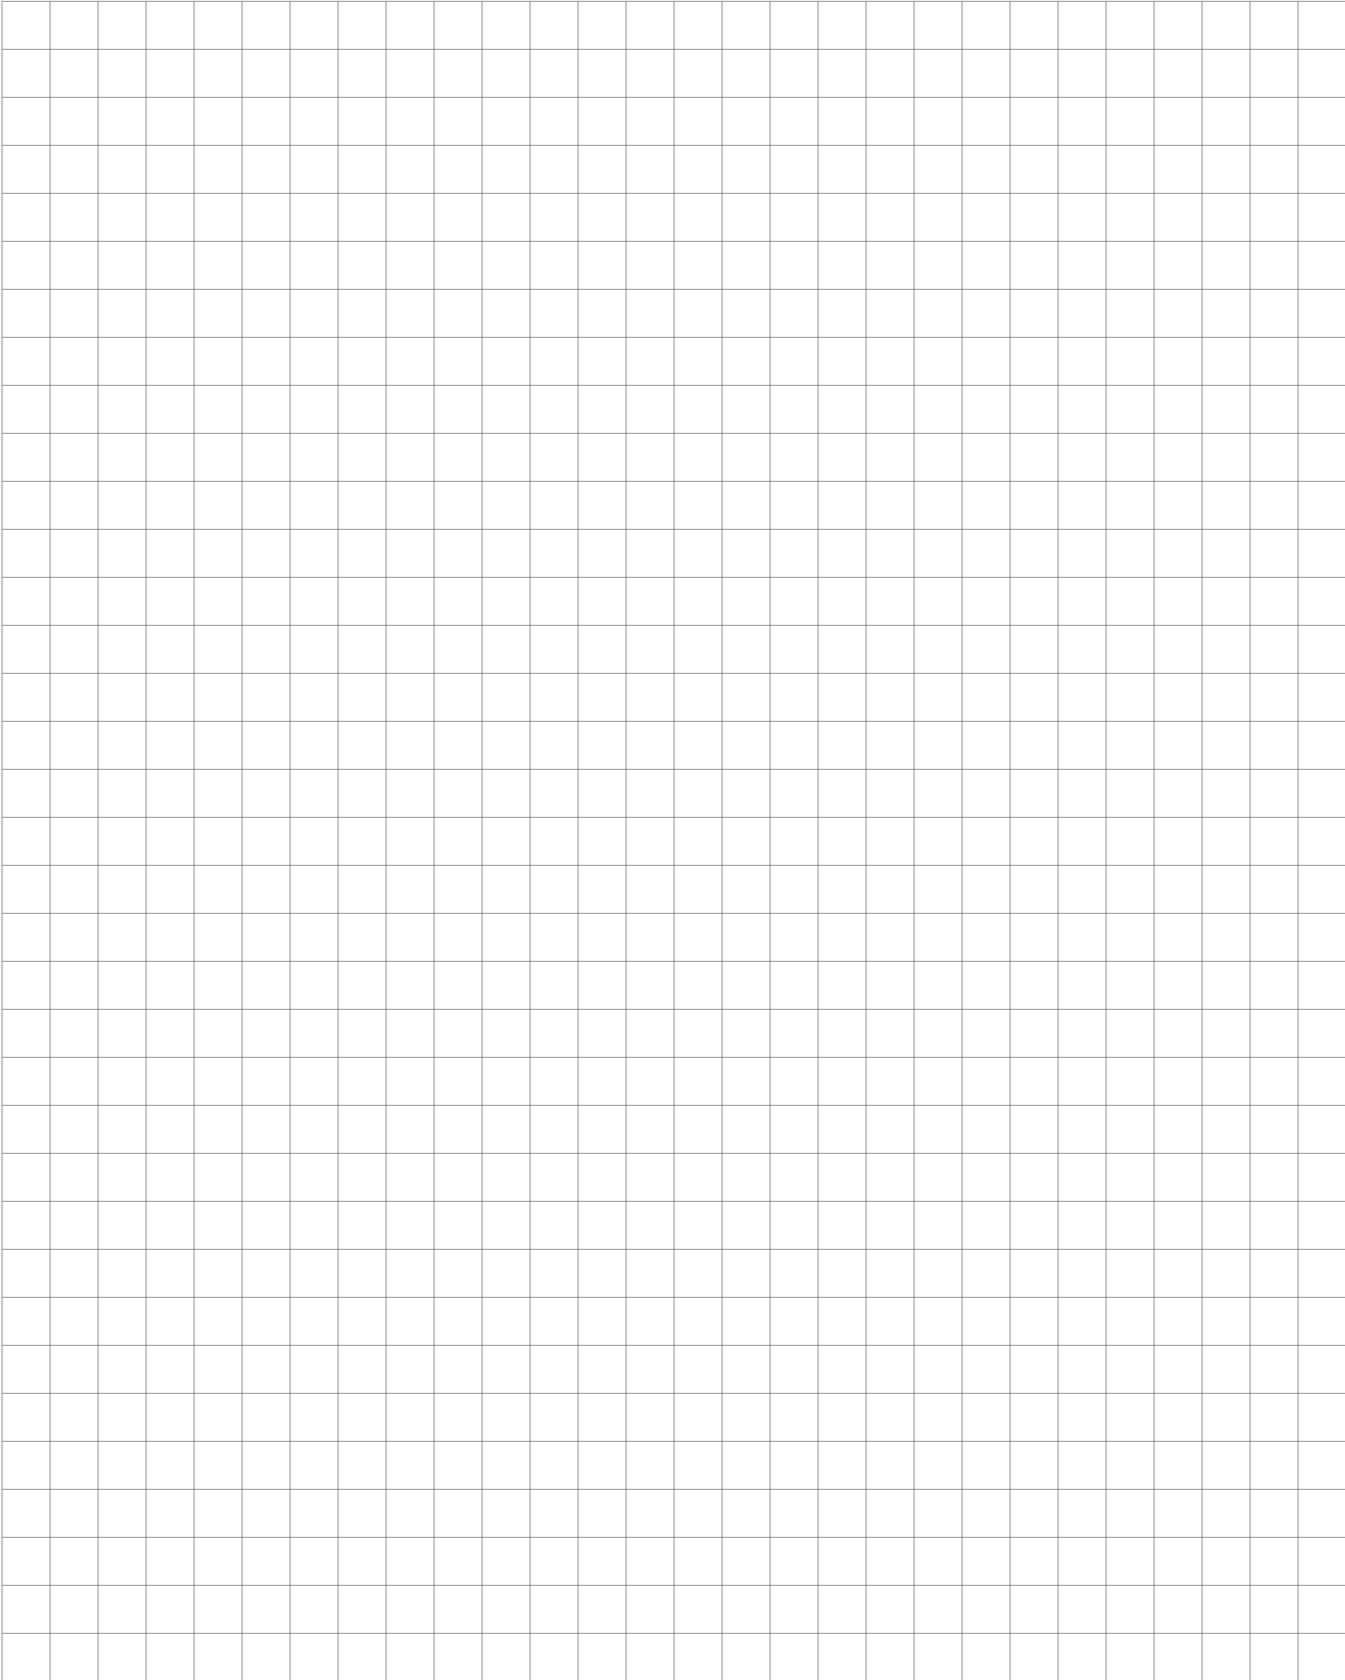



## CONTACT US

**ADDRESS**

9221 Edison  
Montreal, Quebec,  
H1J 1T4, Canada

**FAX**

1.514.903.0649

**EMAIL**

[info@lumentruss.com](mailto:info@lumentruss.com)

**PHONE**

1.855.384.3384

**WEBSITE**

[www.lumentruss.com](http://www.lumentruss.com)



**MADE IN  
NORTH AMERICA**

**LUMEN™  
Truss**