


# DITO

Ceiling LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

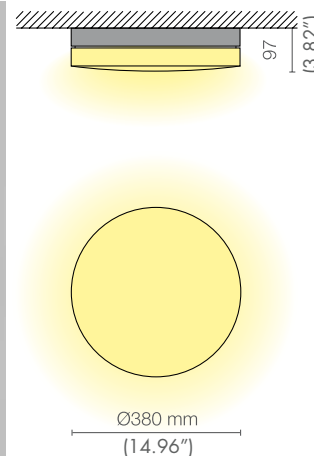

L252672.30		LED	30W	3000K	2900lm	700mA	CRI>80	A+		144/236
L252672.40		LED	30W	4000K	3300lm	700mA	CRI>80	A+		

Ceiling or wall luminaire with diffuse light with a high efficiency LED module. It is made from epoxy powder coated finish aluminium stabilized with UV rays and satin polyethylene light diffuser providing a uniform and discreet light beam. The luminaire is supplied with a driver. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

- 03 Nero lucido  
Glossy black
- 08 Bianco satinato RAL 9003  
Frosted white RAL 9003
- 12 Cromo verniciato  
Chrome painted
- 36 Tortora lucido RAL 1019  
Glossy dove grey RAL 1019

Included: driver  
Photobiological risk group 0,  
in compliance with Standard EN 62471,

VOLTAGE  120V  220V  277V

LEDOLOGY®

A Luminart® BRAND

WWW.LUMINARTLIGHTING.COM


# DITO

Ceiling LED

TYPE:

PROJECT NAME:

MODEL #	FINISH	LED COLOR	OPTIC	DRIVER	VOLTAGE
---------	--------	-----------	-------	--------	---------

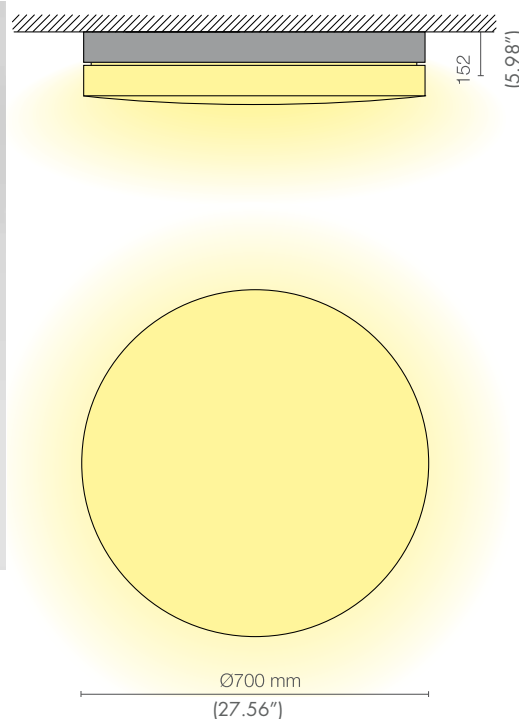

<b>L252673.30</b>		LED	80W	3000K	10560lm	300mA	CRI>80	A++		145/236
<b>L252673.40</b>		LED	80W	4000K	10920lm	300mA	CRI>80	A++		
<b>L252674.30</b>		LED	70W	3000K	8800lm	700mA	CRI>80	A++		146/236
<b>L252674.40</b>		LED	70W	4000K	9200lm	700mA	CRI>80	A++		

Ceiling or wall luminaire with diffuse light with a high efficiency LED modules. It is made from epoxy powder coated finish aluminium stabilized with UV rays and satin polyethylene light diffuser providing a uniform and discreet light beam. The luminaire is supplied a driver. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

SPECIFICATION SHEET

- 03 Nero lucido  
Glossy black
- 08 Bianco satinato RAL 9003  
Frosted white RAL 9003
- 12 Cromo verniciato  
Chrome painted
- 36 Tortora lucido RAL 1019  
Glossy dove grey RAL 1019

Included: driver  
Photobiological risk group 0,  
in compliance with Standard EN 62471

VOLTAGE  120V  220V  277V

**LEDOLOGY**<sup>®</sup>

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM