SHARP
WALL/CEILING LED

TYPE:

PROJECT NAME:

	360°
TC	3000K / 4000K
IP	40
CRI	>80
EEI	A++
RG	0
08	Satin white

ETL
Intertek

SHARP
WALL / CEILING

A strong personality expressed by elegant and harmonious curves. Sharp is a wall/ceiling luminaire for diffuse lighting which relates beauty to high performances and considerable long-term energy savings. It is made from epoxy polyester pow-der coated aluminium and it is equipped with a frosted polyethylene diffuser, a high efficiency LED light source and driver. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

INSTALLATION NOTE:
Comes with 4" SQUARE backplate
to cover the junction box

4"

4"
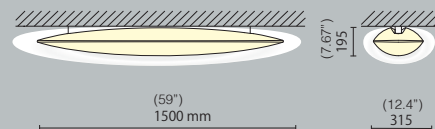
CODE	W	Lm (3000K)
L25A4-630.036...	36	4400
L25A4-631.048...	48	6000

/DIMM2 dimmerabile protocollo DALI
/DIMM3 dimmerabile switch-DIM

(7.67")
195

(59")
1500 mm

(12.4")
315

LEDOLOGY®

A **Luminart** BRAND

SHARP
WALL/CEILING LED

LEDOLOGY®

A **Luminart**®BRAND