


IP20 rated suspension, ceiling, table and floor-standing light fitting for indoor use. made of oxidized aluminum with glass cylinders. the exclusive patented Viabizzuno chain system allow to personalize the light fitting geometry with unlimited possibility of architectural solutions.


versions:

**coppibartali a 4 tavolo, 245mm/9.6" h.385mm/15.2",
coppibartali a 12 tavolo, 765mm/30.1" h.264mm/10.3",
coppibartali a 24 tavolo, 1545mm/68.2" h.264mm/10.3",
coppibartali a 24 sospensione, 1545mm/68.2" h.385mm/15.2",
coppibartali a 48 sospensione, 3105mm/122.2" h.385mm/15.2",
coppibartali a 72 sospensione, 4655mm/183.3" h.385mm/15.2",
coppibartali c 24 sospensione, Ø550mm/21.6" h.385mm/15.2",
coppibartali c 48 sospensione, Ø1045mm/41.1" h.385mm/15.2",
coppibartali c 72 sospensione, Ø1540mm/60.6" h.385mm/15.2",
each cylinder is wired with 2700K 3W 287lm led source.**

finishes: Brushed Satin Brass

customize your light visit www.Viabizzuno.com

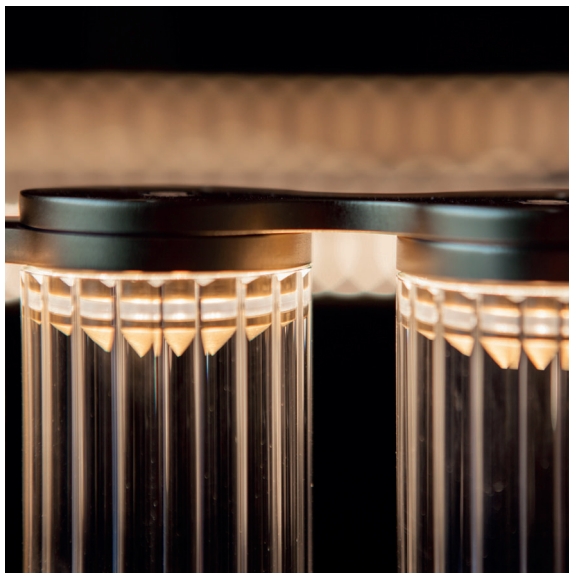

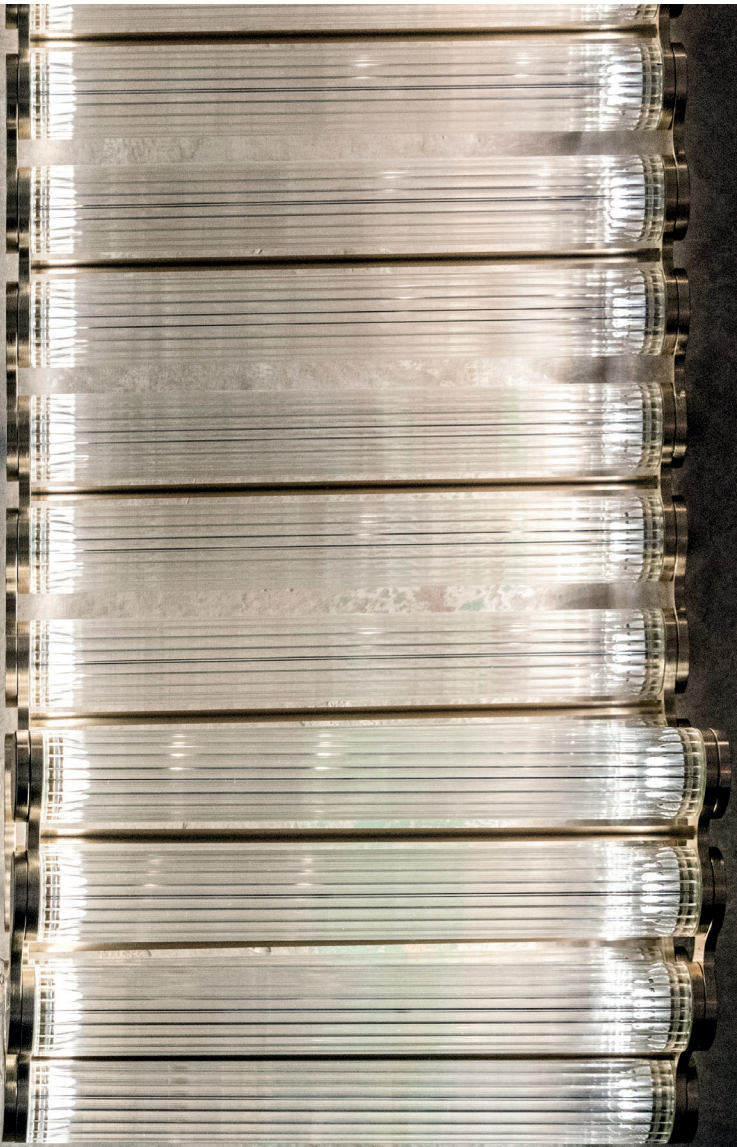


107 Aluminum Tube
107 Aluminum Tube



107 Aluminum Tube
107 Aluminum Tube



107 Aluminum Tube
107 Aluminum Tube




coppibartali a 4 Table lamp 120V 50-60Hz AS

Vb2.636.01.u ottone ap-s vetro pirex · glass 2700K 4x3W 3kg 2,2lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	1148	12	96	A++
cd0324	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v included

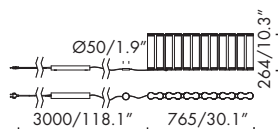


coppibartali a 12 Table large 120V 50-60Hz AS

Vb2.636.03.u ottone ap-s vetro pirex · glass 2700K 12x3W 12kg 26lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	3444	36	96	A++
cd032-12	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v included

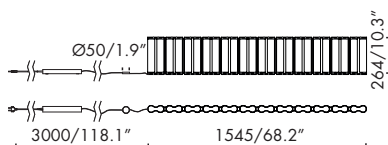


coppibartali a 24 Table XL 120V 50-60Hz AS

Vb2.636.05.u ottone ap-s vetro pirex · glass 2700K 24x3W 19kg 41,8lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	6888	72	96	A++
cd032-24	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		



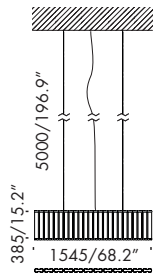

coppibartali a 24 chandelier

48Vdc




Vb8.636.21 ottone ap-s · vetro pirex · glass 2700K 24x3W 18kg
39.7lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	6888	72	96	A++
cd032:24	les6	Ta25 °C		vita media · average life	50000 h	L80	B10			

Remote 48v driver 0-10v dimming only



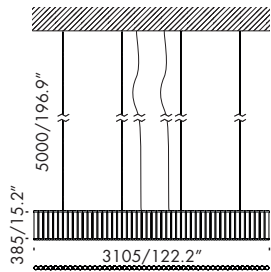



coppibartali a 48 chandelier

48Vdc 




Vb8.636.22 ottone ap-s vetro pirex · glass 2700K 48x3W 36kg
79.4lb

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	13776	144	96	A++
cd032-48	les6 	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v driver 0-10v dimming only



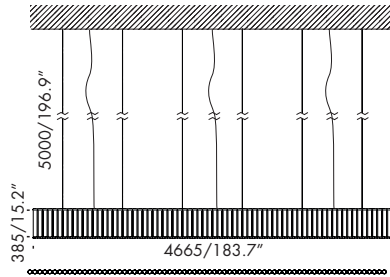



coppibartali a 72 Carpet Chandelier


48Vdc 




Vb8.636.23 ottone ap-s vetro pirex · glass 2700K 72x3W 54kg
119lb

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	20664	216	96	A++
cd03272	les6 	Ta25 °C		vita media · average life	50000 h	L80	B10			

Remote 48v driver 0-10v dimming only

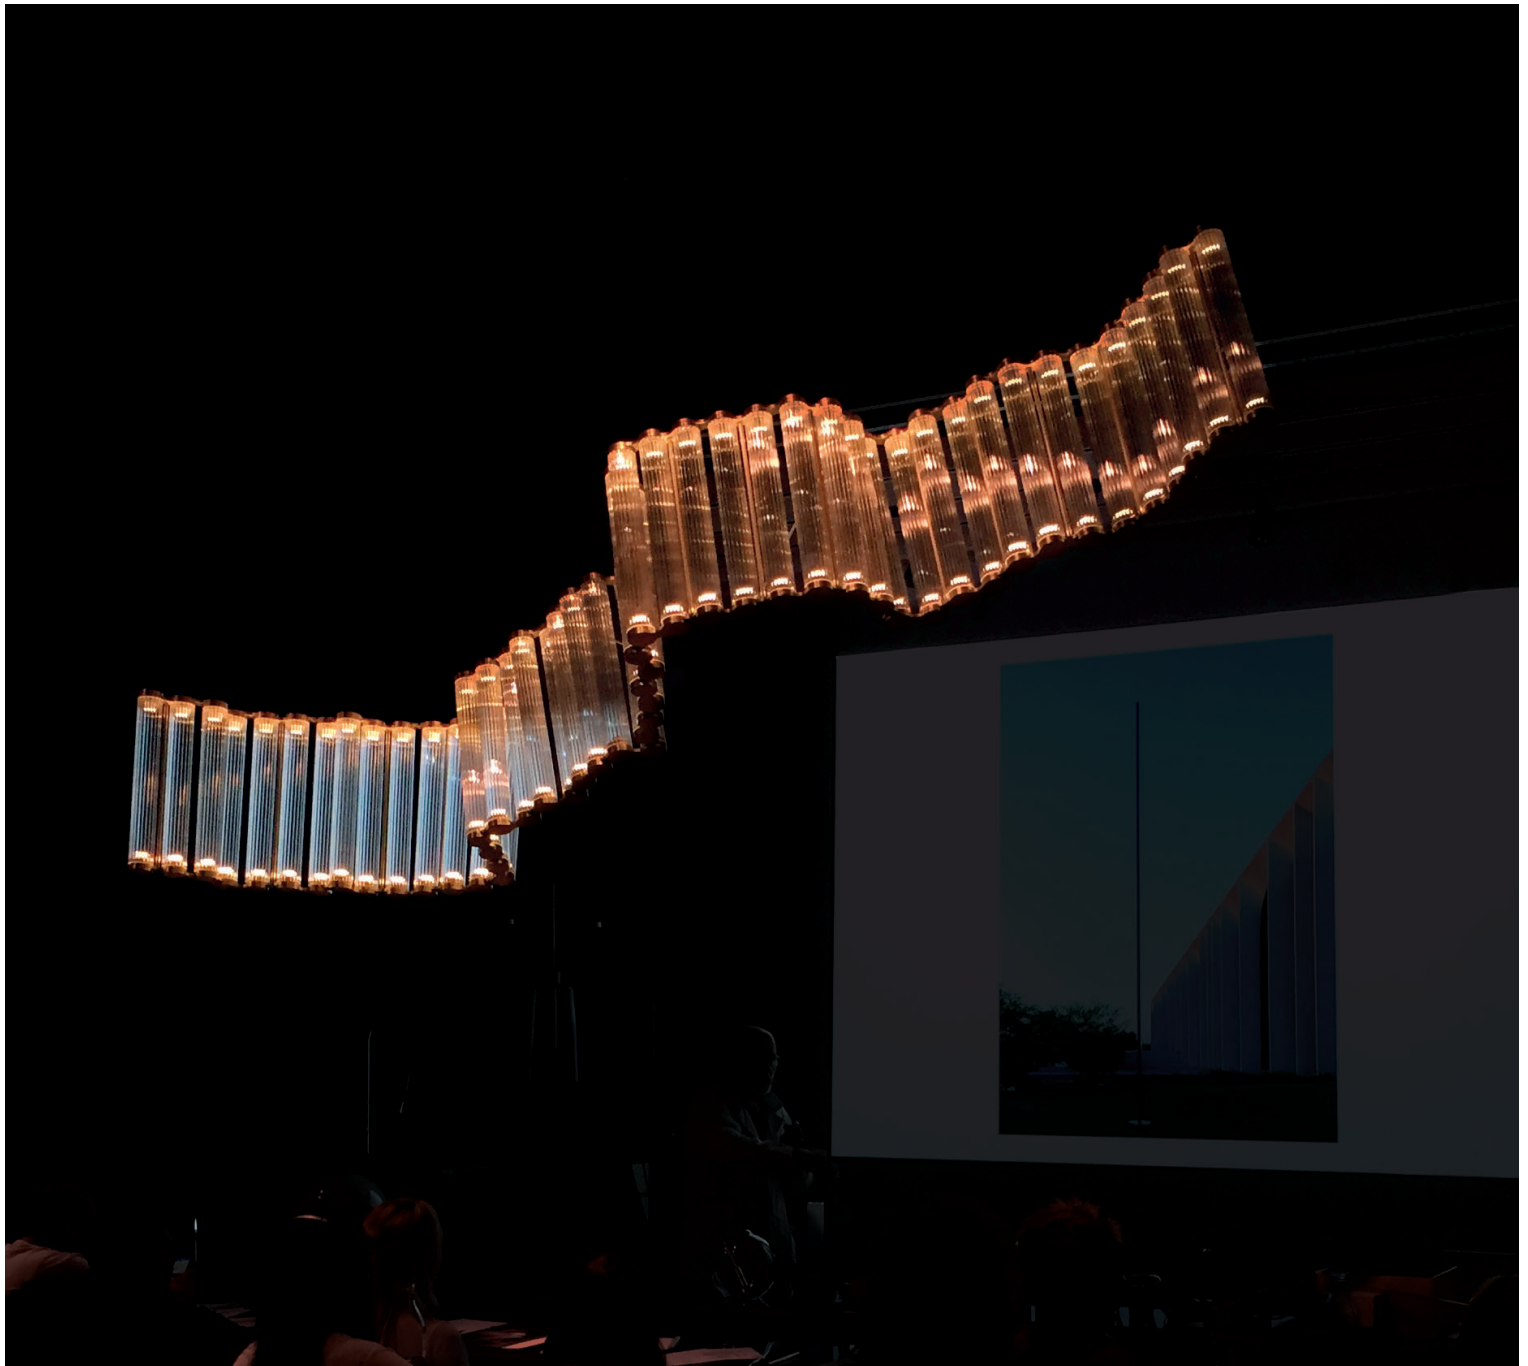

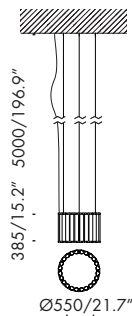
coppibartali c 24 pendant


48Vdc


Vb8.636.31 ottone ap-s vetro pirex · glass 2700K 24x3W 18kg
39.7lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	6888	72	96	A++
cd032:24	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v must be located in an accessible area

0-100-10v dimming only

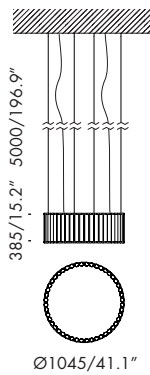
coppibartali c 48 pendant


48Vdc IP20


Vb8.636.32 ottone ap-s vetro pirex · glass 2700K 48x3W 36kg
79.4lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	13776	144	96	A++
cd032:48	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v must be located in an accessible area

0-100-10v dimming only

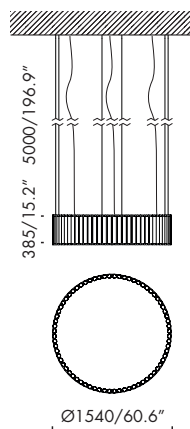
coppibartali c 72 pendant


48Vdc



Vb8.636.33 ottone ap-s vetro pirex · glass 2700K 72x3W 54kg
119lb

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	95	Rf 95	Rg 100	step 2	175	17,1	20664	216	96	A++
cd032:72	les6	Ta25 °C		vita media · average life		50000 h	L80	B10		

Remote 48v must be located in an accessible area













0-100-10v dimming only

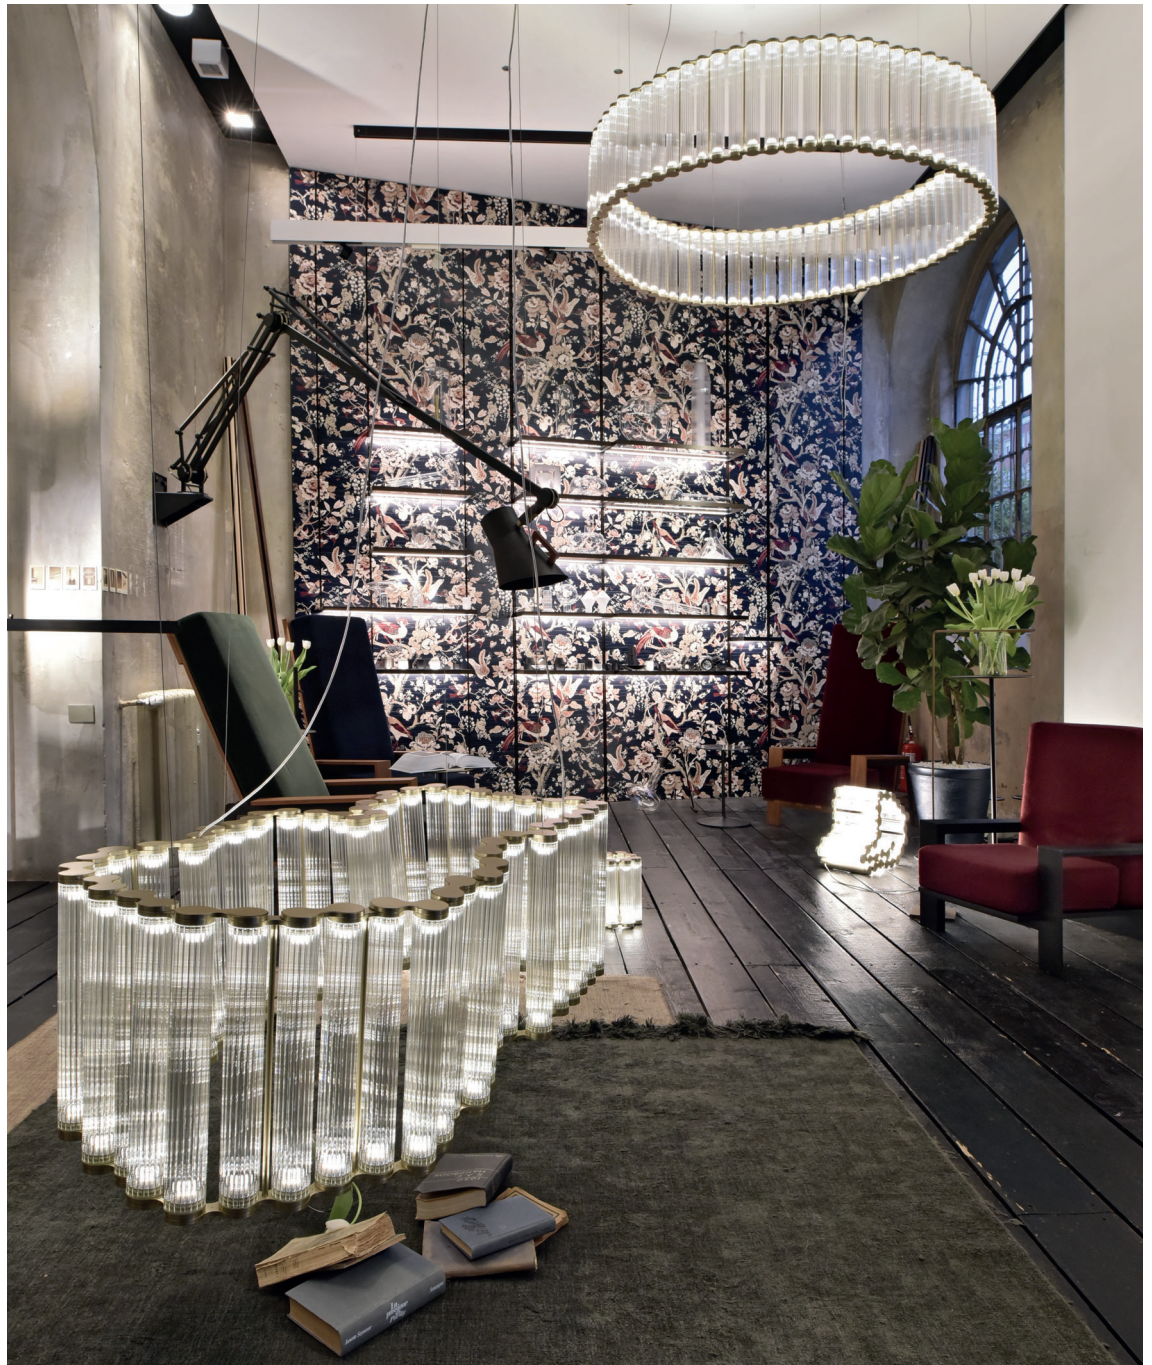

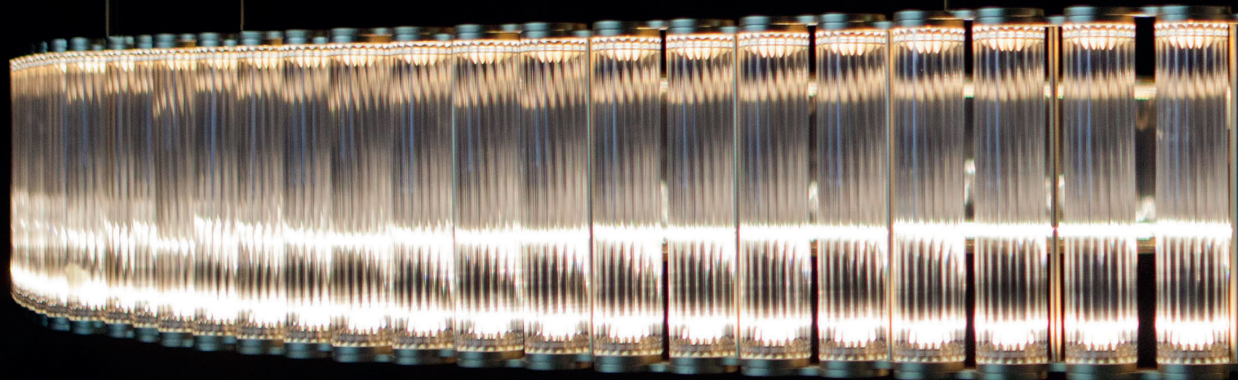




alcuni esempi di possibili configurazioni con geometrie chiuse · some examples of configurations with closed geometries

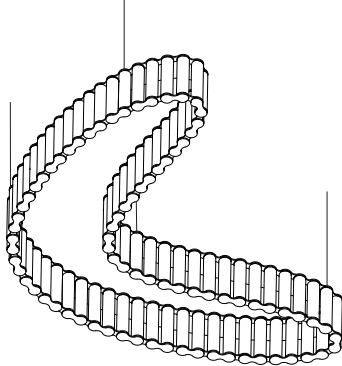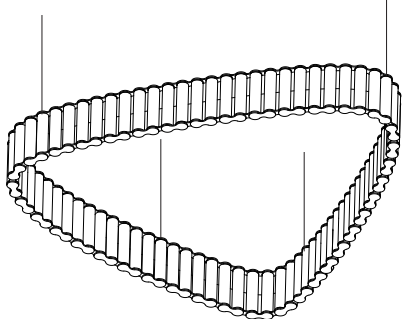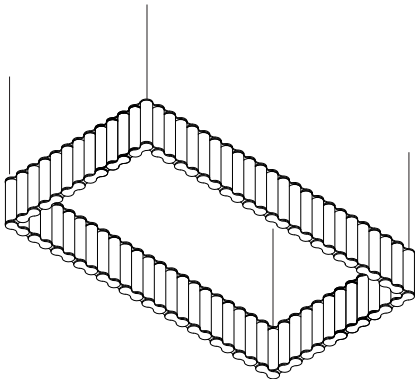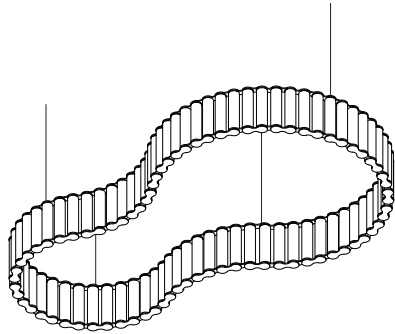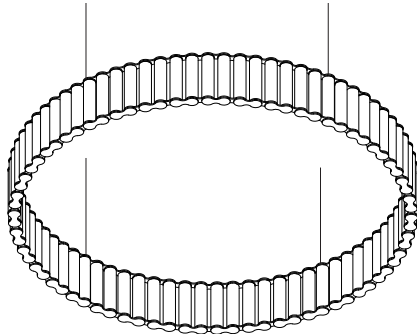





trimless canopy


damp 



Vb9.000.06.u


scomparsa totale cartongesso
fully concealed for plasterboard installation

0,3kg
0.7lb

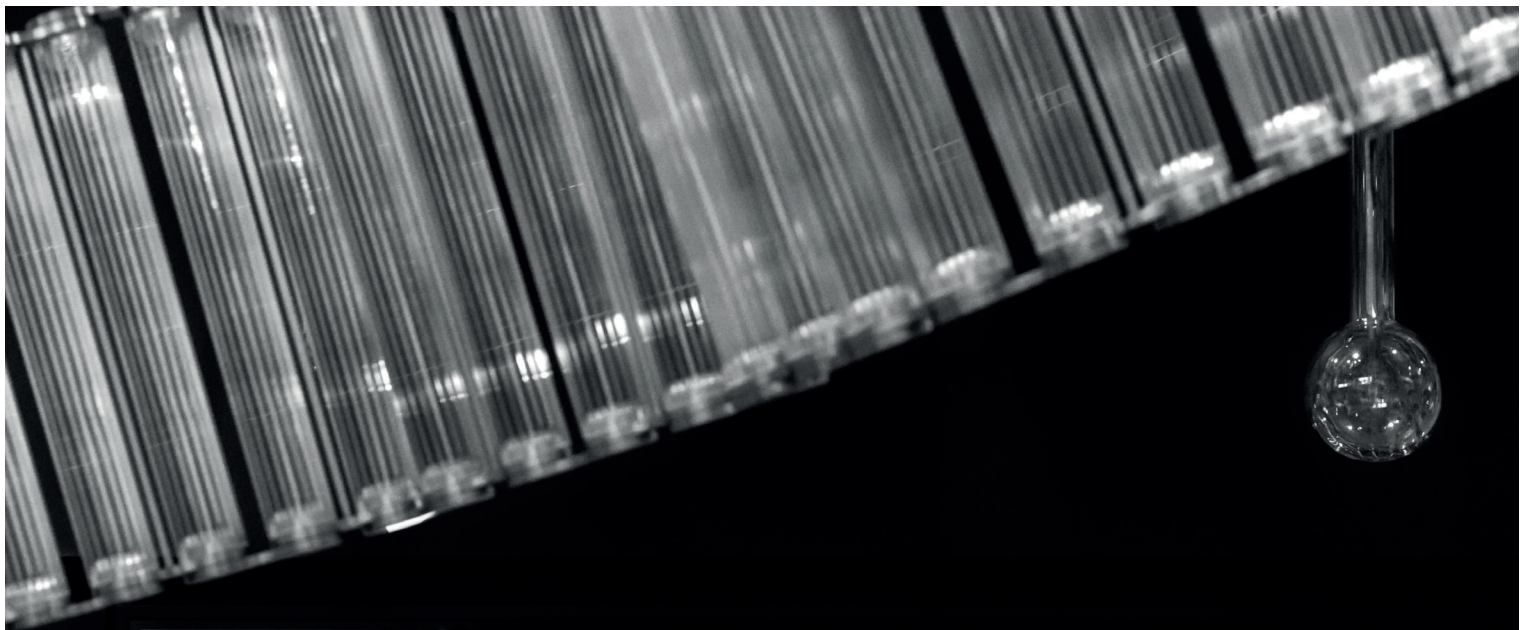

una buona luce 

personalizza la tua luce
vai su Viabizzuno.com

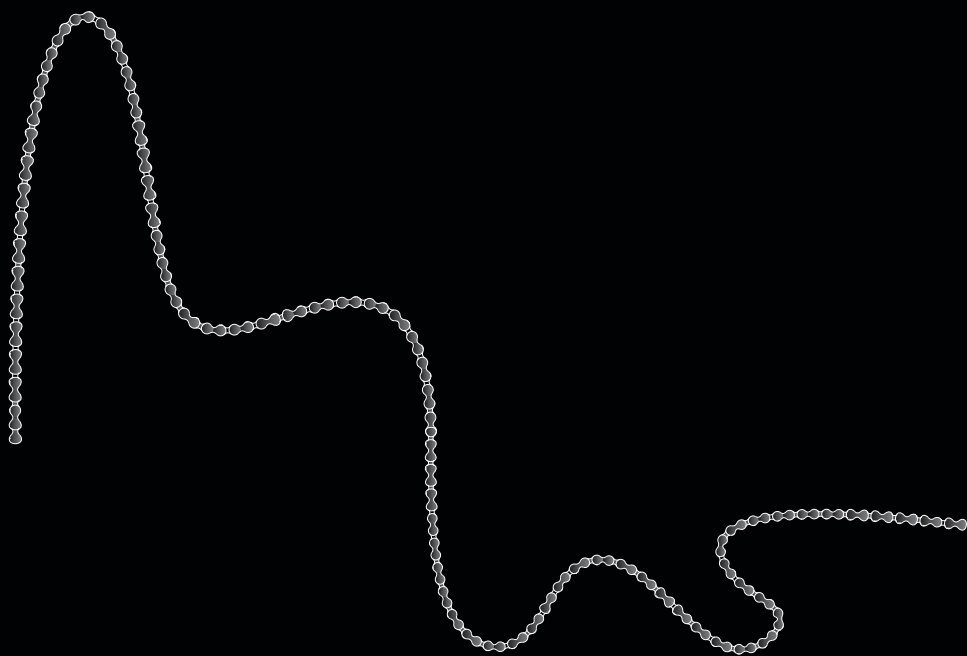












+



1. scegli le dimensioni
choose dimensions

2. scegli il rosone di alimentazione
choose the ceiling rose

alcuni esempi di possibili configurazioni con geometrie aperte - some examples of configurations with open geometries

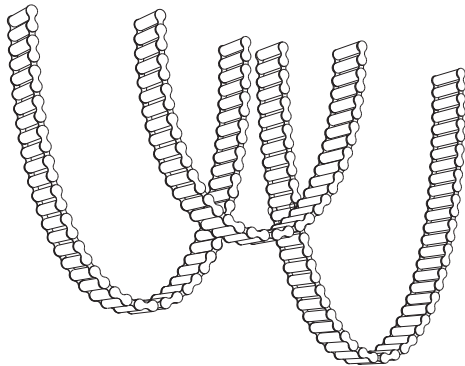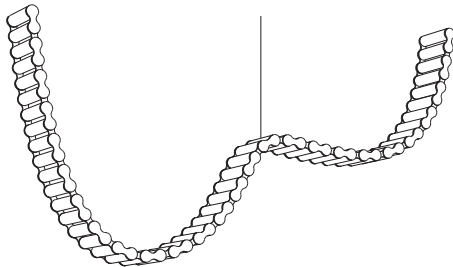



na la luce

alcuni esempi di possibili configurazioni con dimensioni personalizzate · some examples of configurations with customized dimensions

