



**apparecchio di illuminazione da tavolo, terra e parete per interni.
realizzato in alluminio e acciaio.**

modelli:

roy lettura diffusa e roy lettura spot composte da diffusore luminoso 97x38mm/3.8x1.5'', orientabile di 270° sull'asse orizzontale e 180° sull'asse verticale, asta di diametro Ø8mm/0.3'', orientabile di 180° sull'asse verticale, base in acciaio 180x180mm/7.1x7.1x0.4'' con supporto che contiene il sensore touch on/off. alimentatore 120V 50-60Hz a spina incluso.

roy parete diffusa e roy parete spot composte da diffusore luminoso 97x38mm/3.8x1.5'', orientabile di 270° sull'asse orizzontale e 180° sull'asse verticale, asta di diametro Ø8mm/0.3'', orientabile di 180° sull'asse verticale e fissata ad un supporto di fissaggio a parete 120x60x20mm/4.7x2.4x0.8'' che contiene il sensore touch on/off. alimentatore in tensione costante escluso da installare remoto.

roy tavolo diffusa e roy tavolo spot composte da diffusore luminoso 97x38mm/3.8x1.5'', orientabile di 270° sull'asse orizzontale e 180° sull'asse verticale, braccio di diametro Ø8mm/0.3'', orientabile di 180° sull'asse verticale, base in acciaio 120x120x5mm/4.7x4.7x0.2'' con supporto che contiene il sensore touch on/off. alimentatore 120V 50-60Hz a spina incluso.

cablati con sorgente elettronica 3000K 6W 576lm completo di diffusore in policarbonato satinato per luce diffusa, sorgente elettronica 3000K 2,2W 148lm ottica 15° per luce spot.
finiture: nero55, copper bronze.

**dry location rated table, floor-standing, table and wall light fitting for indoor use.
made of aluminium and steel.**

versions:

roy lettura diffusa and roy lettura spot are made of a 97x38mm/3.8x1.5'' light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3'' rod, adjustable by 180° on the vertical axis, 120x241x10mm/4.7x9.5x0.4'' steel base with support which contains the on/off touch sensor. 120V 50-60Hz power supply with plug included.



roy parete diffusa and roy parete spot are made of a 97x38mm/3.8x1.5'' light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3'' rod, adjustable by 180° on the vertical axis and fastened to a 120x60x20mm/4.7x2.4x0.8'' support for wall mounting which contains the on/off touch sensor. constant voltage power supply not included to be installed remotely.

roy tavolo diffusa and roy tavolo spot are made of a 97x38mm/3.8x1.5'' light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3'' rod, adjustable by 180° on the vertical axis, 120x120x5mm/4.7x4.7x0.2'' steel base with support which contains the on/off touch sensor. 120V 50-60Hz power supply with plug included.





wired with 3000K 6W 576lm led source equipped with a frosted polycarbonate diffuser for diffused light, 3000K 2.2W 148lm led source, 15° optics spot light.
finishes: nero55, copper bronze.



Vb4.577.62/64

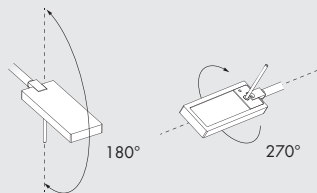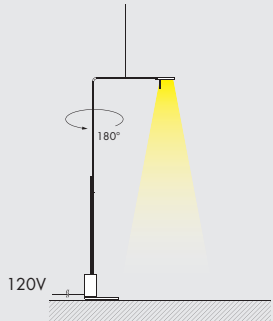

Vb4.577.72/74

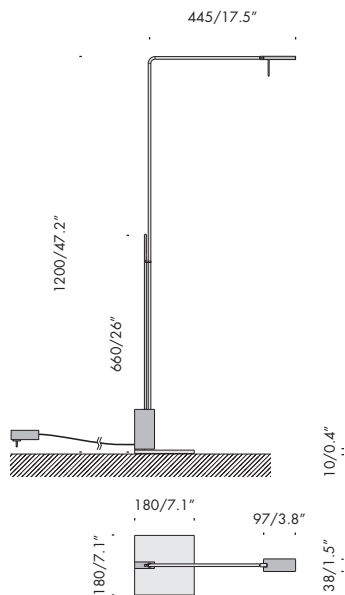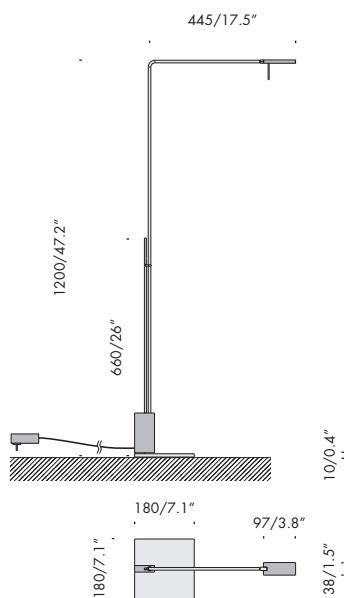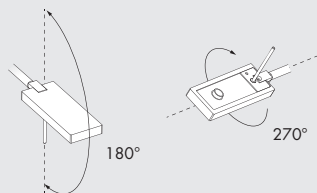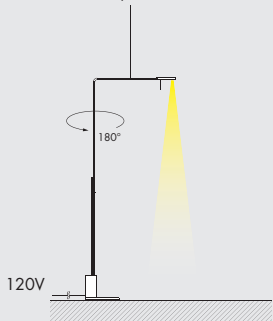

roy lettura diffusa 120V 50-60Hz **dry**


Vb4.577.62	nero55	3000K	7kg 15.4lb
Vb4.577.64	copper bronze	3000K	7kg 15.4lb

Ra	R9	ies tm-30	sdc	V _f	lm	W	lm/W	
95	90	Rf 93 Rg 102	step 2	24,0	576	6	96	A+
Vz081		Ta25 °C vita media · average life		50000 h	L80	B10		


roy lettura spot 120V 50-60Hz **dry**










Vb4.577.72	nero55	3000K	7kg 15.4lb
Vb4.577.74	copper bronze	3000K	7kg 15.4lb

Ra	ies tm-30	sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90 Rg 100	step 2	700	3,0	148	2,2	70	A+
ca021 les2		Ta25 °C vita media · average life		50000 h	L70	B10		

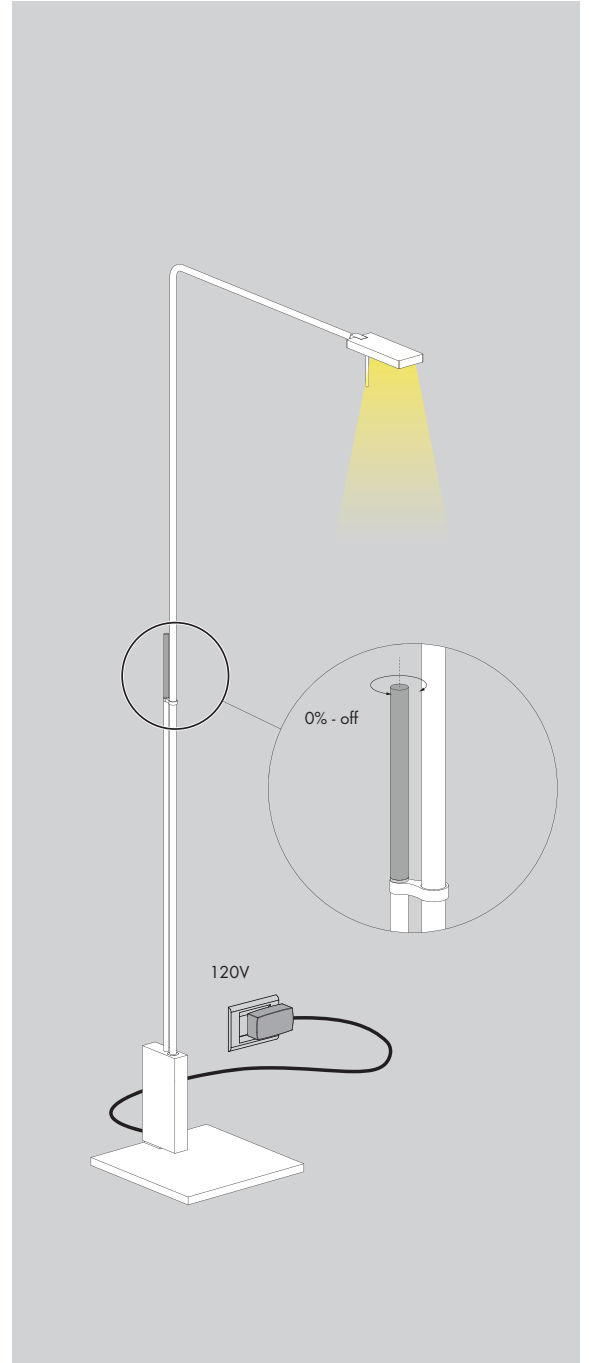



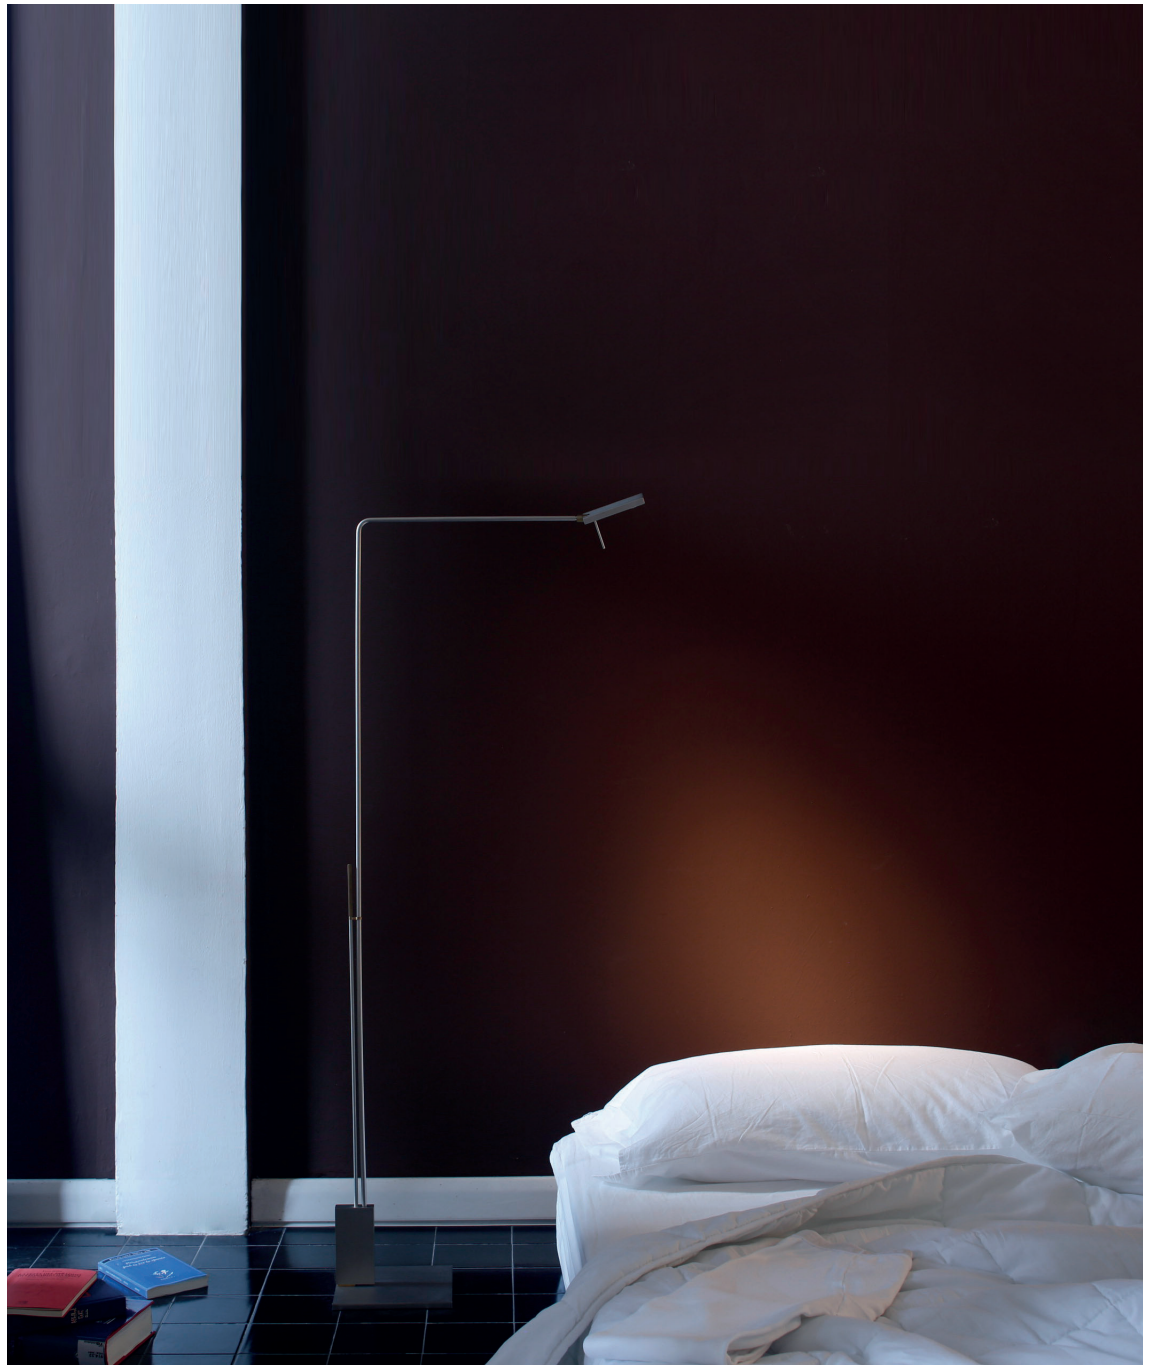

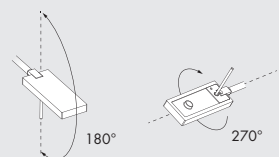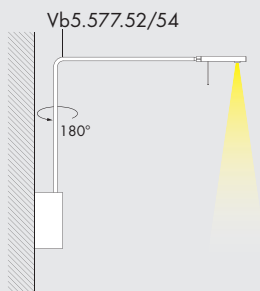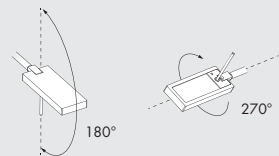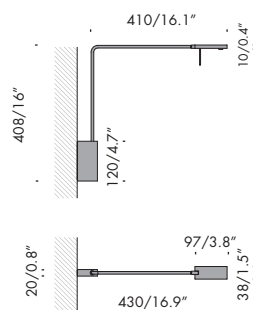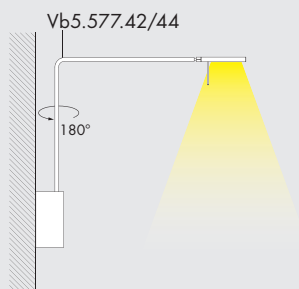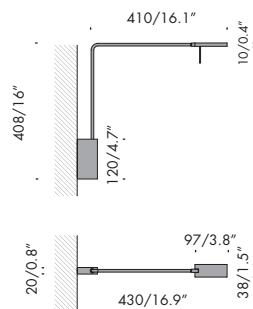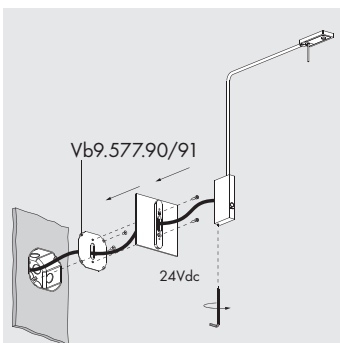

roy parete diffusa		24Vdc		damp			
Vb5.577.42	nero55			3000K			1,5kg 3.3lb
Vb5.577.44	copper bronze			3000K			1,5kg 3.3lb

Ra	R9	ies tm-30		sdc	V _f	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	576	6	96	A+
Vz081		Ta25 °C vita media · average life			50000 h	L80	B10		

roy parete spot		24Vdc		damp			
Vb5.577.52	nero55			3000K			1,5kg 3.3lb
Vb5.577.54	copper bronze			3000K			1,5kg 3.3lb

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	3,0	148	2,2	70	A+
ca021	les2		Ta25 °C		vita media · average life		50000 h	L70	B10

copertura per outlet box. cover for outletbox.			
Vb9.577.90	nero55		0,5kg 1.1lb
Vb9.577.91	copper bronze		0,5kg 1.1lb




alimentatori. power supplies.		120 50-60Hz		damp		
t4.005.1		24V	25W			0,3kg 0.7lb







Vb2.577.04/02

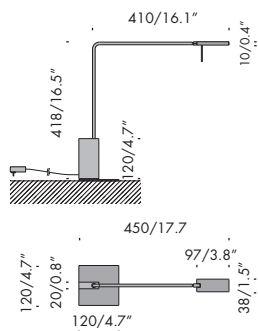
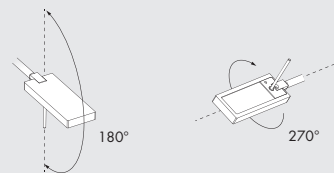
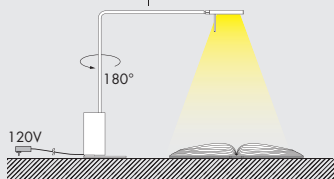


roy tavolo diffusa 120V 50-60hz **AS** dry

Vb2.577.02	nero55	3000K	2,9kg 6.4lb
Vb2.577.04	copper bronze	3000K	2,9kg 6.4lb

Ra	R9	ies tm-30		sdc	V _f	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	576	6	96	A+
Vz081	Ta25 °C			vita media · average life	50000 h	L80	B10		

Vb2.577.12/14

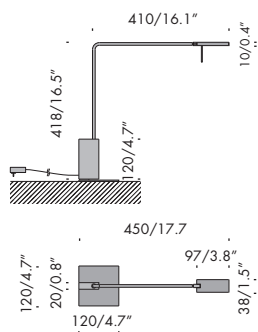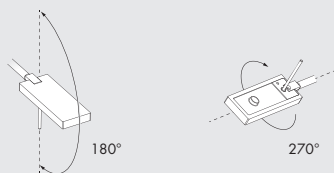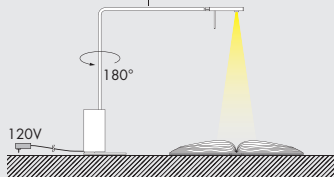

roy tavolo spot 120V 50-60hz **AS** dry

Vb2.577.12	nero55	3000K	2,9kg 6.4lb
Vb2.577.14	copper bronze	3000K	2,9kg 6.4lb

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	3,0	148	2,2	70	A+
ca021	les2		Ta25 °C		vita media · average life	50000 h	L70	B10	

