



damp location rated suspension light fitting for indoor use, made of oxidised aluminium, consisting of a 1100mm/43.3" or 2600mm/102.3" internally electrified leather belt which is connected to the diffuser by means of a cable with "underskin" connector.

versions:

**sul**, with an extra-clear glass sphere diameter Ø175mm/6.8", a metal disc diameter Ø255mm/8.8" and a transparent crystal diffuser, available with rose version diameter Ø55 h.270mm or fully concealed version,

**sole**, with an extra-clear glass bulb diameter Ø234mm/9.2" and a transparent crystal diffuser on the side, available with rose version diameter Ø55mm/2.1" h.270mm/10.6" or fully concealed version,

**va**, consisting of metal bell diameter Ø55mm/2.1" for accent light, available with rose version diameter Ø55mm/2.1" h.270mm/10.6" or fully concealed version, wired with 2700K Ra95 6.8W 433lm led source.

120V 50-60Hz power supply included in the rose versions diameter Ø55mm/2.1" h.270mm/10.6".


any irregularities in the glass are a guarantee of an unique product, blown and entirely hand crafted by master glassmakers.

power supply not included to be installed remotely in the fully concealed versions.

finishes: satin brass.



a&d trophy awards asia-pacific 2016 certificate of excellence

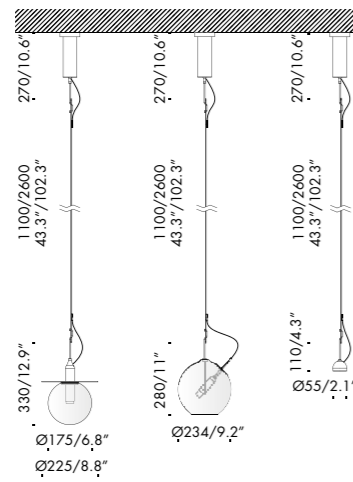


**sul sole va** 120V 50-60Hz **A** damp

- Via.621.0001.u** black leather electrified belt 2700K 3x6,8W 1100mm 2,5kg  
43.3" 5.5lb
- Via.621.0002.u** tortora leather electrified belt 2700K 3x6,8W 1100mm 2,5kg  
43.3" 5.5lb
- Via.621.0003.u** black leather electrified belt 2700K 3x6,8W 2600mm 2,8kg  
102.3" 6.1lb
- Via.621.0004.u** tortora leather electrified belt 2700K 3x6,8W 2600mm 2,8kg  
102.3" 6.1lb

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

Set of three



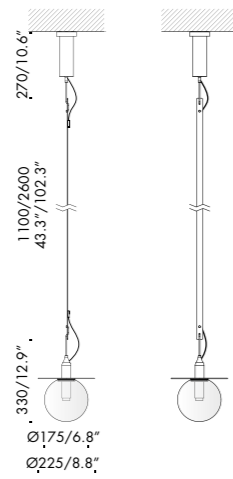

**sul** 120V 50-60Hz **A** damp **i**


- Vb8.621.01.27.u** cinghia in pelle nera elettrificata e sfera in vetro con disco  
black leather electrified belt and glass sphere with plate 2700K 6,8W 1100mm 1,4kg 43.3" 3lb
- Vb8.621.02.27.u** cinghia in pelle tortora elettrificata e sfera in vetro con disco  
tortora leather electrified belt and glass sphere with plate 2700K 6,8W 1100mm 1,4kg 43.3" 3lb
- Vb8.621.03.27.u** cinghia in pelle nera elettrificata e sfera in vetro con disco  
black leather electrified belt and glass sphere with plate 2700K 6,8W 2600mm 1,5kg 102.3" 3.3lb
- Vb8.621.04.27.u** cinghia in pelle tortora elettrificata e sfera in vetro con disco  
tortora leather electrified belt and glass sphere with plate 2700K 6,8W 2600mm 1,5kg 102.3" 3.3lb

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

**sole** 120V 50-60Hz **A** damp **i**

- Vb8.621.21.27.u** cinghia in pelle nera elettrificata e sfera in vetro  
black leather electrified belt and glass sphere 2700K 6,8W 1100mm 0,8kg 43.3" 1.7lb
- Vb8.621.22.27.u** cinghia in pelle tortora elettrificata e sfera in vetro  
tortora leather electrified belt and glass sphere 2700K 6,8W 1100mm 0,8kg 43.3" 1.7lb
- Vb8.621.23.27.u** cinghia in pelle nera elettrificata e sfera in vetro  
black leather electrified belt and glass sphere 2700K 6,8W 2600mm 0,9kg 102.3" 1.9lb
- Vb8.621.24.27.u** cinghia in pelle tortora elettrificata e sfera in vetro  
tortora leather electrified belt and glass sphere 2700K 6,8W 2600mm 0,9kg 102.3" 1.9lb

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

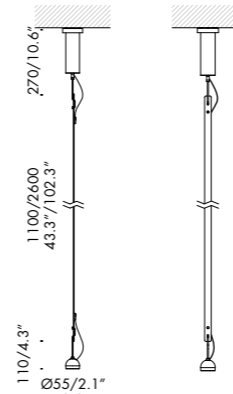


**va** 120V 50-60Hz **A** damp **i**


- Vb8.621.41.27.u** cinghia in pelle nera elettrificata e campana in metallo  
black leather electrified belt and metal bell 2700K 6,8W 1100mm 0,3kg 43.3" 0.6lb
- Vb8.621.42.27.u** cinghia in pelle tortora elettrificata e campana in metallo  
tortora leather electrified belt and metal bell 2700K 6,8W 1100mm 0,3kg 43.3" 0.6lb
- Vb8.621.43.27.u** cinghia in pelle nera elettrificata e campana in metallo  
black leather electrified belt and metal bell 2700K 6,8W 2600mm 0,4kg 102.3" 0.8lb
- Vb8.621.44.27.u** cinghia in pelle tortora elettrificata e campana in metallo  
tortora leather electrified belt and metal bell 2700K 6,8W 2600mm 0,4kg 102.3" 0.8lb

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

**copertura per outlet box. cover for outlet box** **i**

- Vb9.000.01.u** ~~scomparsa totale cartongesso~~  
fully concealed for plasterboard installation 0,3kg 0.7lb



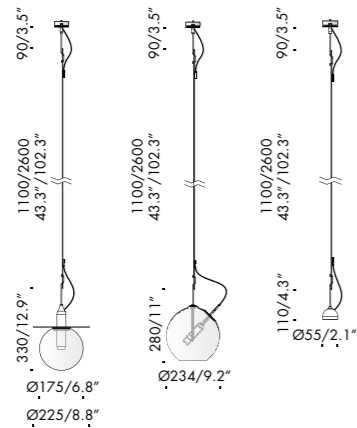


**sul sole va** 120V 50-60Hz damp

- Via.621.0011** cinghia in pelle nera elettrificata 2700K 3x6,8W 1100mm 2,3kg  
black leather electrified belt 43.3" 5lb
- Via.621.0012** cinghia in pelle tortora elettrificata 2700K 3x6,8W 1100mm 2,3kg  
tortora leather electrified belt 43.3" 5lb
- Via.621.0013** cinghia in pelle nera elettrificata 2700K 3x6,8W 2600mm 2,6kg  
black leather electrified belt 102.3" 5.7lb
- Via.621.0014** cinghia in pelle tortora elettrificata 2700K 3x6,8W 2600mm 2,6kg  
tortora leather electrified belt 102.3" 5.7lb


Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	



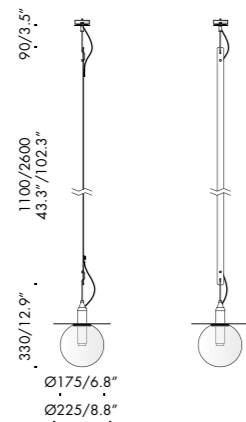


sul		damp		i	
<b>Vb8.621.11.27</b>	cinghia in pelle nera elettrificata e sfera in vetro con disco black leather electrified belt and glass sphere with plate	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.12.27</b>	cinghia in pelle tortora elettrificata e sfera in vetro con disco tortora leather electrified belt and glass sphere with plate	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.13.27</b>	cinghia in pelle nera elettrificata e sfera in vetro con disco black leather electrified belt and glass sphere with plate	2700K	2600mm 1,4kg 102.3" 3lb		
<b>Vb8.621.14.27</b>	cinghia in pelle tortora elettrificata e sfera in vetro con disco tortora leather electrified belt and glass sphere with plate	2700K	2600mm 1,4kg 102.3" 3lb		

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

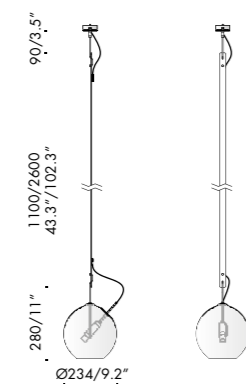

sole		damp		i	
<b>Vb8.621.31.27</b>	cinghia in pelle nera elettrificata e sfera in vetro black leather electrified belt and glass sphere	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.32.27</b>	cinghia in pelle tortora elettrificata e sfera in vetro tortora leather electrified belt and glass sphere	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.33.27</b>	cinghia in pelle nera elettrificata e sfera in vetro black leather electrified belt and glass sphere	2700K	2600mm 1,4kg 102.3" 3lb		
<b>Vb8.621.34.27</b>	cinghia in pelle tortora elettrificata e sfera in vetro tortora leather electrified belt and glass sphere	2700K	2600mm 1,4kg 102.3" 3lb		



Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	



va		damp		i	
<b>Vb8.621.51.27</b>	cinghia in pelle nera elettrificata e campana in metallo black leather electrified belt and metal bell	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.52.27</b>	cinghia in pelle tortora elettrificata e campana in metallo tortora leather electrified belt and metal bell	2700K	1100mm 1,3kg 43.3" 2.8lb		
<b>Vb8.621.53.27</b>	cinghia in pelle nera elettrificata e campana in metallo black leather electrified belt and metal bell	2700K	2600mm 1,4kg 102.3" 3lb		
<b>Vb8.621.54.27</b>	cinghia in pelle tortora elettrificata e campana in metallo tortora leather electrified belt and metal bell	2700K	2600mm 1,4kg 102.3" 3lb		

Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W
98	95	Rf 95	Rg 100	step 2	350	18,2	504	6,4	78
cd032	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	






copertura per outlet box. cover for outlet box		i	
<b>Vb9.000.01.u</b>	scomparsa totale cartongesso fully concealed for plasterboard installation	0,3kg 0.7lb	



alimentatori. power supplies.		120-277V 50-60Hz		damp		i	
<b>t4.320.u</b>	350mA	4-52V	18W	0,3kg 0.7lb			



installazione decentramento a soffitto  
decentralization for ceiling installation

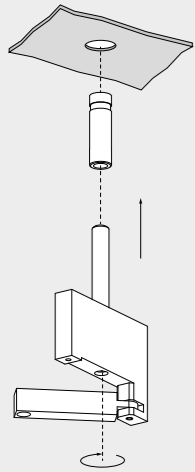

**accessori. accessories.**

**Vb8.621.80** decentramento per installazione a soffitto  
decentralization for ceiling installation 0,01kg  
0.2lb

**Vb8.621.81** fibbia regolazione lunghezza cinghia  
adjustment buckle for leather belt 2 pz - pcs 0,01kg  
0.2lb

fibbia regolazione  
adjustment buckle

