

FEATURES


Dimension: 9x16mm / 0,4"x0x6"
 Weight: 0,12Kg/m
 Application: interior
 Fixed by magnets

LIGHT SOURCE UNIT

250 led/m - dimm
 17W/m (2240lm)
 Full range of color temperatures available:
 CRI90 : 2200 / 5700K / 6500K
 CRI98 : 2700K/3000K / 3500K / 4000K / 6500K
 CRI70 : 8000K/10000K

ELECTRICAL

Voltage: 24Vdc
 Power absorbed: 17W/m
 Driver: escluded

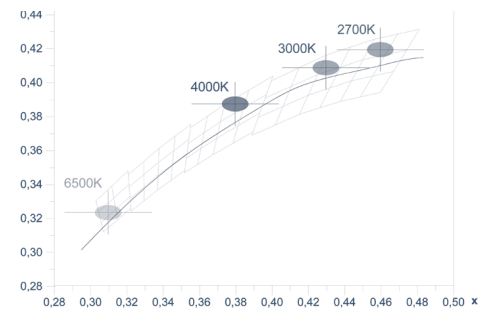

CE, F, IP40, CEI 34-21, IEC/EN 60598, IEC/EN 62471, EN 62031, MADE IN ITALY

REV_ june 2023
 subject to change without notice

Subject to change without notice
 TRANSPORT CONDITIONS : Ambient temperature 0°C - +35°C; Relative Humidity 5% - 70% Rh.
 STORAGE CONDITIONS : 0°C - 40°C; Humidity relative 5% - 70% Rh, No dew, No Water spray. Recommended storage Temp is : 25°C with Humidity < 65% Rh.
 OPERATIONAL ENVIRONMENTAL CONDITIONS : Ambient temp : +5°C - 35°C Relative Humidity : 20% - 75% Rh